

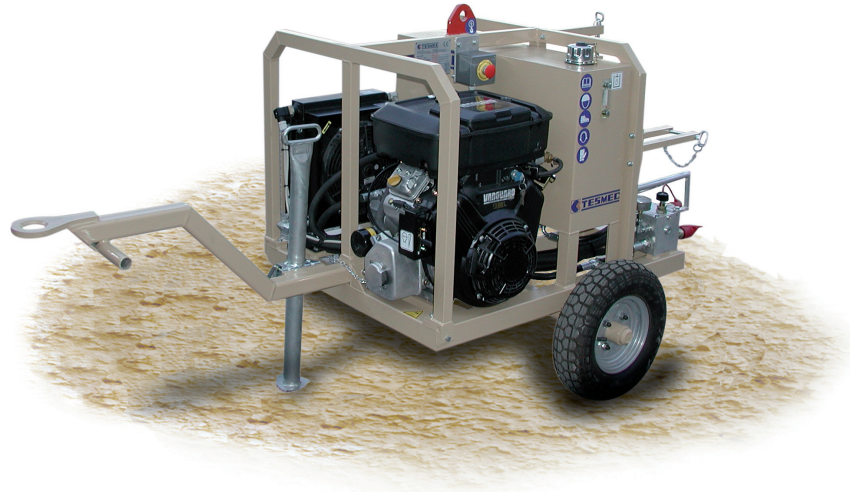



These units have been designed to power drum stand equipped with hydraulic head for tensioning operation when the tensioner in use is passive type

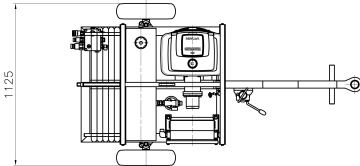

Certified Quality System
ISO 9001:2000

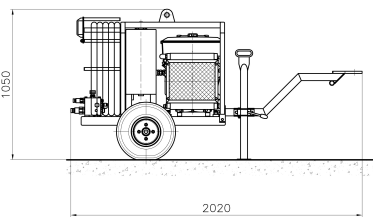

ENGINE

Gasoline	13 kW
Cooling system	air
Electrical system	12 V

HYDRAULIC TRANSMISSION

Half open hydraulic circuit

CONFIGURATION

Hydraulic oil cooling system
Rigid axle for towing at max speed of 30 Km/h
Towing bar unit with height regulation system

Kit of connecting hoses

TUT 001 length 7 m, mass 11 Kg
TUT 002 length 10 m, mass 15 Kg
TUT 003 length 15 m, mass 23 Kg

OPTIONAL

- 112** Type approved trailer for towing at max speed of 80 km/h with mechanical parking brake.
Towing bar with inertial braking system and towing hook, caravan type and eye hook Ø 40 mm.
Lighting system trailer

M = 200 kg