

Clamp Model	Jaws Model	D [mm]	Use
MOT 130 GC	GTF 110	7 ÷ 10	Aluminium conductor Aluminium conductor Aluminium conductor OPGW
	GTF 113	10 ÷ 13	
	GTF 116	13 ÷ 16	
	GTW xxx	7 ÷ 13	
MOT 150 GC	GTU 117	14 ÷ 17	Aluminium conductor Aluminium conductor Aluminium conductor OPGW
	GTU 120	17 ÷ 20	
	GTU 123	20 ÷ 23	
	GTO xxx	12 ÷ 23	
MOT 170 GC	GTX 226	22.8 ÷ 26	Aluminium conductor Aluminium conductor Aluminium conductor
	GTX 229	26 ÷ 29	
	GTX 232	29 ÷ 32	
MOT 020	GTE 040	Specify the diameter on the order	Aluminium or copper conductors Round steel rope Antitwisting braided rope
	GTE 041		
	GTE 042		

xxx Specify the diameter on the order



RADIAL LOCKING CLAMP MOS

The radial locking clamp can be used whenever a conductor or a rope made of aluminium, aluminium/steel, copper or steel has to be stretched.


The body is made of high-strength steel. It is made up of a series of hinged elements, which can be locked by nuts.

A special hook is provided at one end. The galvanisation treatment on the surface protects from oxidation



Specify the following data on the order:

D = conductor diameter

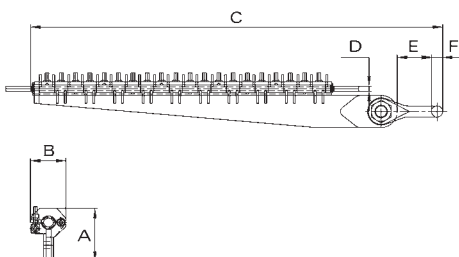

Max Breaking load [kN]	Number of eyebolts	Dimensions [mm]					Approx Mass [kg]
		A	B	C	E	F	
180	6	min158÷max176	min128÷max156	736	67	26	28
240	8	min158÷max176	min128÷max156	852	67	26	38
300	10	min158÷max176	min128÷max156	968	67	26	41
420	14	min158÷max176	min128÷max156	1210	95	32	46
600	20	min203÷max221	min128÷max156	1670	139	45	50