



The service snatch blocks can be opened at one side. The wheels are mounted on ball bearings

Certified Quality System
ISO 9001:2000

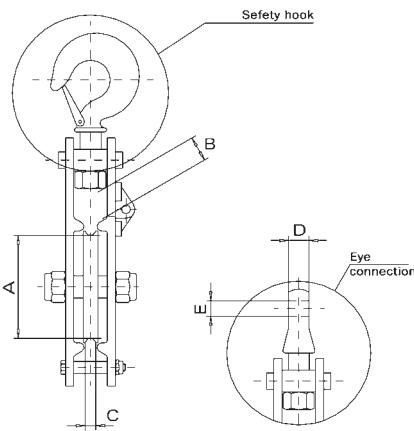

STEEL SERVICE SNATCH BLOCKS Mod. CZA

Swivel connection		Dimensions [mm]					Breaking load [kN]	Mass [kg]	
Safety hook connection	Eye connection	A	B	C	D	E		Safety hook connection	Eye connection
CZA 010	CZA 001	108	40	15	20	17	90	5	4.9
CZA 030	CZA 020	138	40	15	27	21	180	9.5	8.5
CZA 140	CZA 280	185	55	30	30	26	250	12	12

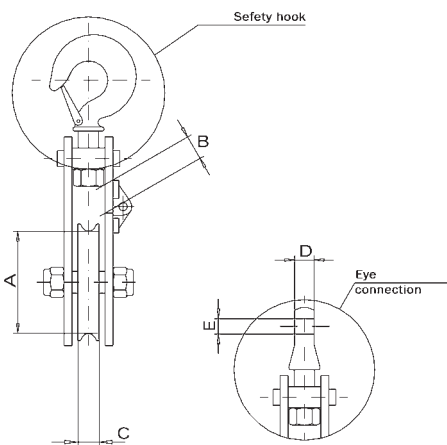

ALUMINIUM ALLOY SERVICE SNATCH BLOCKS Mod. CZL

Swivel connection		Dimensions [mm]					Breaking load [kN]	Mass [kg]
Safety hook connection	Eye connection	A	B	C	D	E		Safety hook and eye connection
CZL 050	CZL 040	100	30	22	14	18	30	1.6
CZL 080	CZL 070	140	40	25	16	18	60	2.8