



The machine is suitable to string one rope.
The bull-wheel grooves are made of thermally treated steel

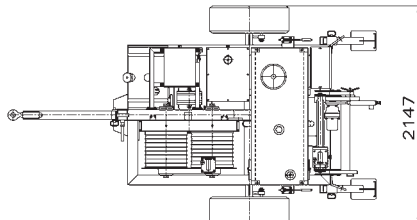

Certified Quality System
ISO 9001:2000

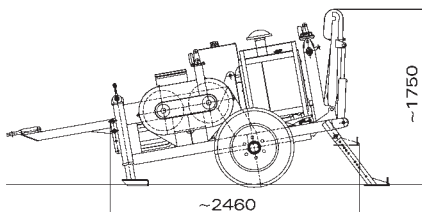

M = 2100 kg

PERFORMANCE

Max pull	70 kN
Speed at max pull	1,8 km/h
Max speed	4 km/h
Pull at max speed	32 kN

Note: the basic machine performance is calculated at 20°C and at sea level

CHARACTERISTICS

Bull-wheel diameter	400 mm
Max rope diameter	16 mm

ENGINE

Diesel	60 kW
Cooling system	water
Electrical system	12 V

HYDRAULIC TRANSMISSION

Closed hydraulic circuit for stepless speed variation in both rotating directions

CONFIGURATION

Negative self-acting hydraulic brake

Hydraulic dynamometer with set-point and automatic control of maximum pull

Hydraulic oil cooling system

Control instruments for hydraulic system and Diesel engine

Rigid axle for towing at max speed of 30 km/h

Built-in self-loading reel winder with automatic level wind, suitable for standard reel mod. BOF 010 and BOF 020

Mechanical actuated front plough stabiliser

EQUIPMENT ON DEMAND

- 037 Artic kit for use up to -20°
- 050 Pull pre-setting system
- 071 Hydraulically actuated pulling rope clamp for reel change operation

OPTIONAL

- 053 Equipment for electronic firing parameter recorder
- 111 Cable guide pivot pulley suitable for work in manhole and into ditch

AXR 001 Extra shaft

DLR 100 Electronic firing parameter recorder



DLR 100



Opt. 111