

POSITIONING BELT DPC 440

Certified Quality System
ISO 9001:2000


Belt for work positioning. This product is not designed for use as a fall arrest device

Features

- 3 buckles for attaching a tool bag
- Side anchoring: 2 stainless steel "D" rings

OPTIONAL

DPF 460 Positioning rope 2 m

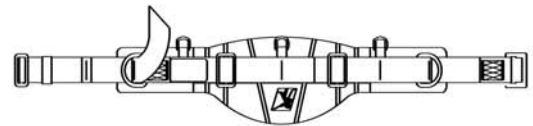

SAFETY HARNESS DPI 480

Harness with:

- A back anchor point
- A chest anchor point
- Adjustable thoracic webbing with quick fitting buckle



OPTIONAL

DPM 430 Fall arrest device including 0,3 m rope

DPF 470 STANDARD ROPE
20 m Ø 14 mm 3-strand
Polyamide fibre rope

DPB 450 NYLON BAG

APPLICATIONS

Individual, vertical, sliding fall arrest device. It ensures protection against falls when a user moves vertically along an anchorage line (textile rope).

DESCRIPTION AND PRINCIPLE

Fall arrest device; free vertical movement at normal speed.

Housing may be opened by using the captive screw and flat bolt.

Locking is due to the differential speed which engages an eccentric cam during the fall, between the user and the device on its support.

The energy is absorbed by the lengthening of the support (>10%) and by the sliding movement along it.

The device has a locking ring which prevents attachment to the support upside down.

An arrow indicates the correct direction of movement and position for attachment to the support.



DPA 490 CONNECTOR

