
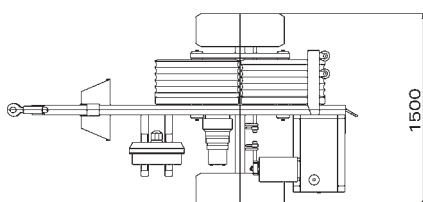


The machine is suitable to string one rope or one conductor.
The bull-wheel grooves are made up of high resistance interchangeable nylon sectors

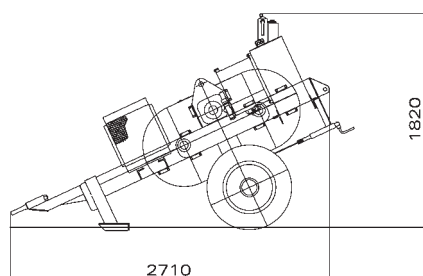

M = 1000 kg

PERFORMANCE

Max tension 25 kN

Max speed 5 km/h

Note: the basic machine performance is calculated at 20°C and at sea level

CHARACTERISTICS

Bull-wheel diameter 660 mm

Max conductor diameter 24 mm

HYDRAULIC TRANSMISSION

Hydraulic open circuit that provides very sensitive tensioning control and negligible deviations of tension in case of speed change

CONFIGURATION

Negative self-acting hydraulic brake

Hydraulic dynamometer

Hydraulic oil cooling system

Mechanical meter counter

Rigid axle for towing at max speed of 30 km/h with mechanical parking brake

Mechanical actuated front plough stabiliser

EQUIPMENT ON DEMAND

- 084** Gearbox with 3 operating positions:
- neutral position (with free bull-wheels for conductor loading and unloading)
 - low tension position (1.5 ÷ 5 kN)
 - nominal tension position