



Hydraulic winch specifically designed for stringing operations on low and medium voltage overhead lines and for assembling and lifting operations.



The winches are provided with a detachable capstan

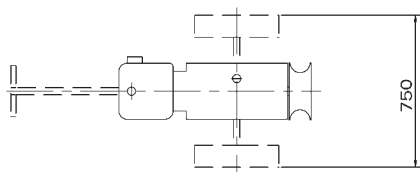

Complete with ADT 001

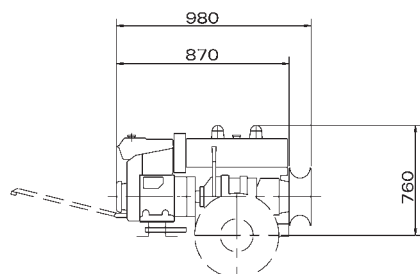

M = 100 kg

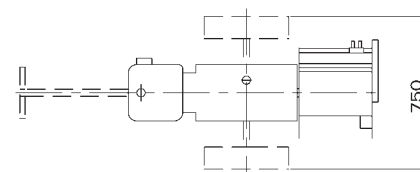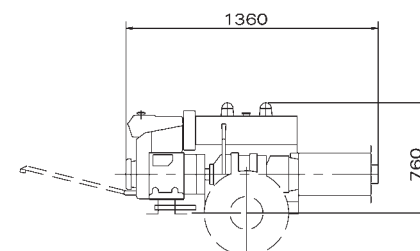

AMB 101 with ADT 001

M = 130 kg

PERFORMANCE

Max pull	10 kN
Speed at max pull	1.0 km/h

Max speed	1.9 km/h
-----------	----------

Note: the basic machine performance is calculated at 20°C and at sea level

CHARACTERISTICS

Diameter capstan	220 mm
------------------	--------

ENGINE

Gasoline	5.1 kW
----------	--------

Cooling system	air
----------------	-----

Starting system	by handle
-----------------	-----------

HYDRAULIC TRANSMISSION

Closed hydraulic circuit for stepless speed variation in both rotating directions

CONFIGURATION

Negative self-acting hydraulic brake

OPTIONAL

- 102 Pulling rope locking device when capstan is used (compulsory for EC market)
- 105 Rigid axle and detachable towing bar, for manual towing
- 113 Handbarrow

ADT 001

Drum with automatic level wind suitable for correct winding of the rope on the drum

- External diameter 350 mm
- Internal diameter 200 mm
- Width 400 mm
- Capacity 300 m rope Ø 8 mm