


The lifting tackles are suitable for \varnothing 9 mm steel ropes; the wheels are mounted on ball bearings. The frame is made of galvanised steel




Certified Quality System
ISO 9001:2000

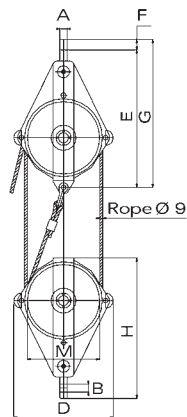

Model	Dimensions [mm]											Breaking load [kN]	Mass [kg]
	A	B	C	D	E	F	G	H	I	L	M		
TAP 001	22	20	67	242	333	20	353	331	8	10,5	180	150	17
TAP 010	22	23	85	294	380	28	408	386	10	16	180	250	27
TAP 020	22	26	120	294	405	35	440	415	10	10,5	180	400	42

LIFTING HOIST PAX

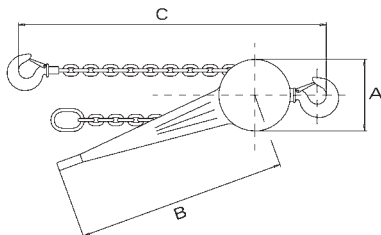

The lifting hoists are made of steel and equipped with mechanical brake; they are designed to facilitate and accelerate chain positioning operations. Chains with different lengths are available on request



Model	Dimensions [mm]			Hook travel [m]	Pulling force with full load [kN]	Capacity [kN]	Mass [kg]
	A	B	C min				
PAX 001	153	290	303	1.5	0.2	7.5	7
PAX 002	153	290	303	3	0.2	7.5	9
PAX 003	153	290	303	6	0.2	7.5	14
PAX 010	160	410	365	1.5	0.21	15	11
PAX 011	160	410	365	3	0.21	15	14
PAX 012	160	410	365	6	0.21	15	20
PAX 020	185	410	485	1.5	0.33	30	20
PAX 021	185	410	485	3	0.33	30	27
PAX 022	185	410	485	6	0.33	30	42
PAX 030	230	410	600	1.5	0.35	60	30
PAX 031	230	410	600	3	0.35	60	37
PAX 032	230	410	600	6	0.35	60	52